



Pump Model	GSB 150	Flange Detail		Part / DWG #	
Pump Speed	2980 rpm Clockwise	Suction	DN 200 - PN 64	DE/NDE Impeller	150-22/23
Max No. Stages	12 Stages	Delivery	DN 150 - PN 160	DE/NDE Diffuser	150-09/10
Max Head	2034.6 m	Pumped Medium - Water @		DE/NDE Last Diff	150-07/08
Max Flowrate	550.0 m ³ /h	Temperature	20 °C	Stage Casing	150-04/05
Max Efficiency	80.0%	Viscosity	1 cP	Suction Casing	150-01
Max Abs Power	223.9 kW Per Stage	Density	998 kg/m ³	Discharge Casing	150-03

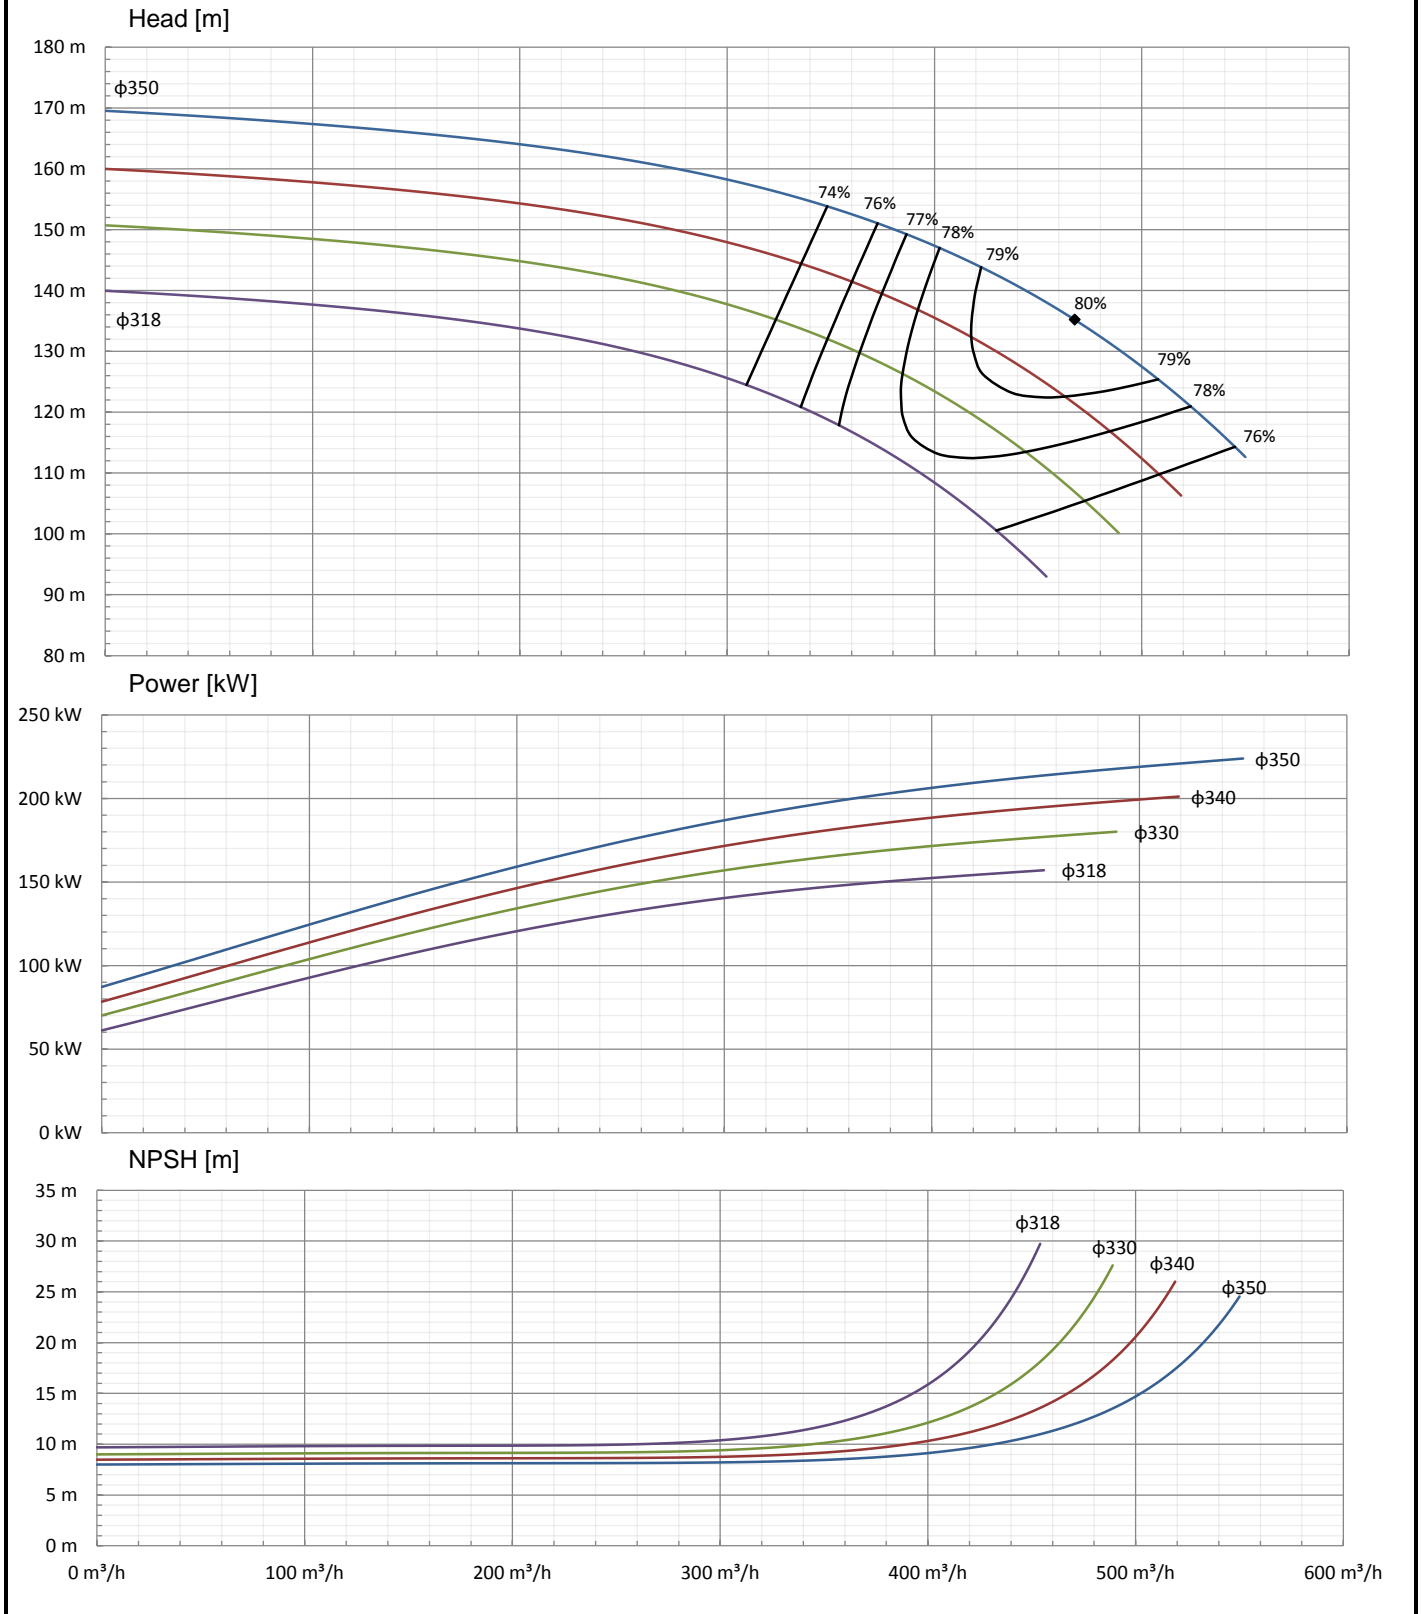

DOCUMENT NUMBER:	SCAG-R-210	ENGINEER:	Craig Adamson
REVISION:	3	PROJECT:	
DATE:	2017/03/14	CUSTOMER:	

Pump Model	GSB 150	Flange Detail		Part / DWG #	
Pump Speed	2980 rpm Clockwise	Suction	DN 200 - PN 64	1st Impeller	150-22/23
Max No. Stages	12 Stages	Delivery	DN 150 - PN 160	Impeller	150-09/10
Max Head	2034.6 m	Pumped Medium - Water @		Diffuser	150-07/08
Max Flowrate	550.0 m ³ /h	Temperature	20 °C	Last Diffuser	150-04/05
Max Efficiency	80.0%	Viscosity	1 cP	Overflow	150-01
Max Abs Power	223.9 kW Per Stage	Density	998 kg/m ³	Stage Casing	150-03

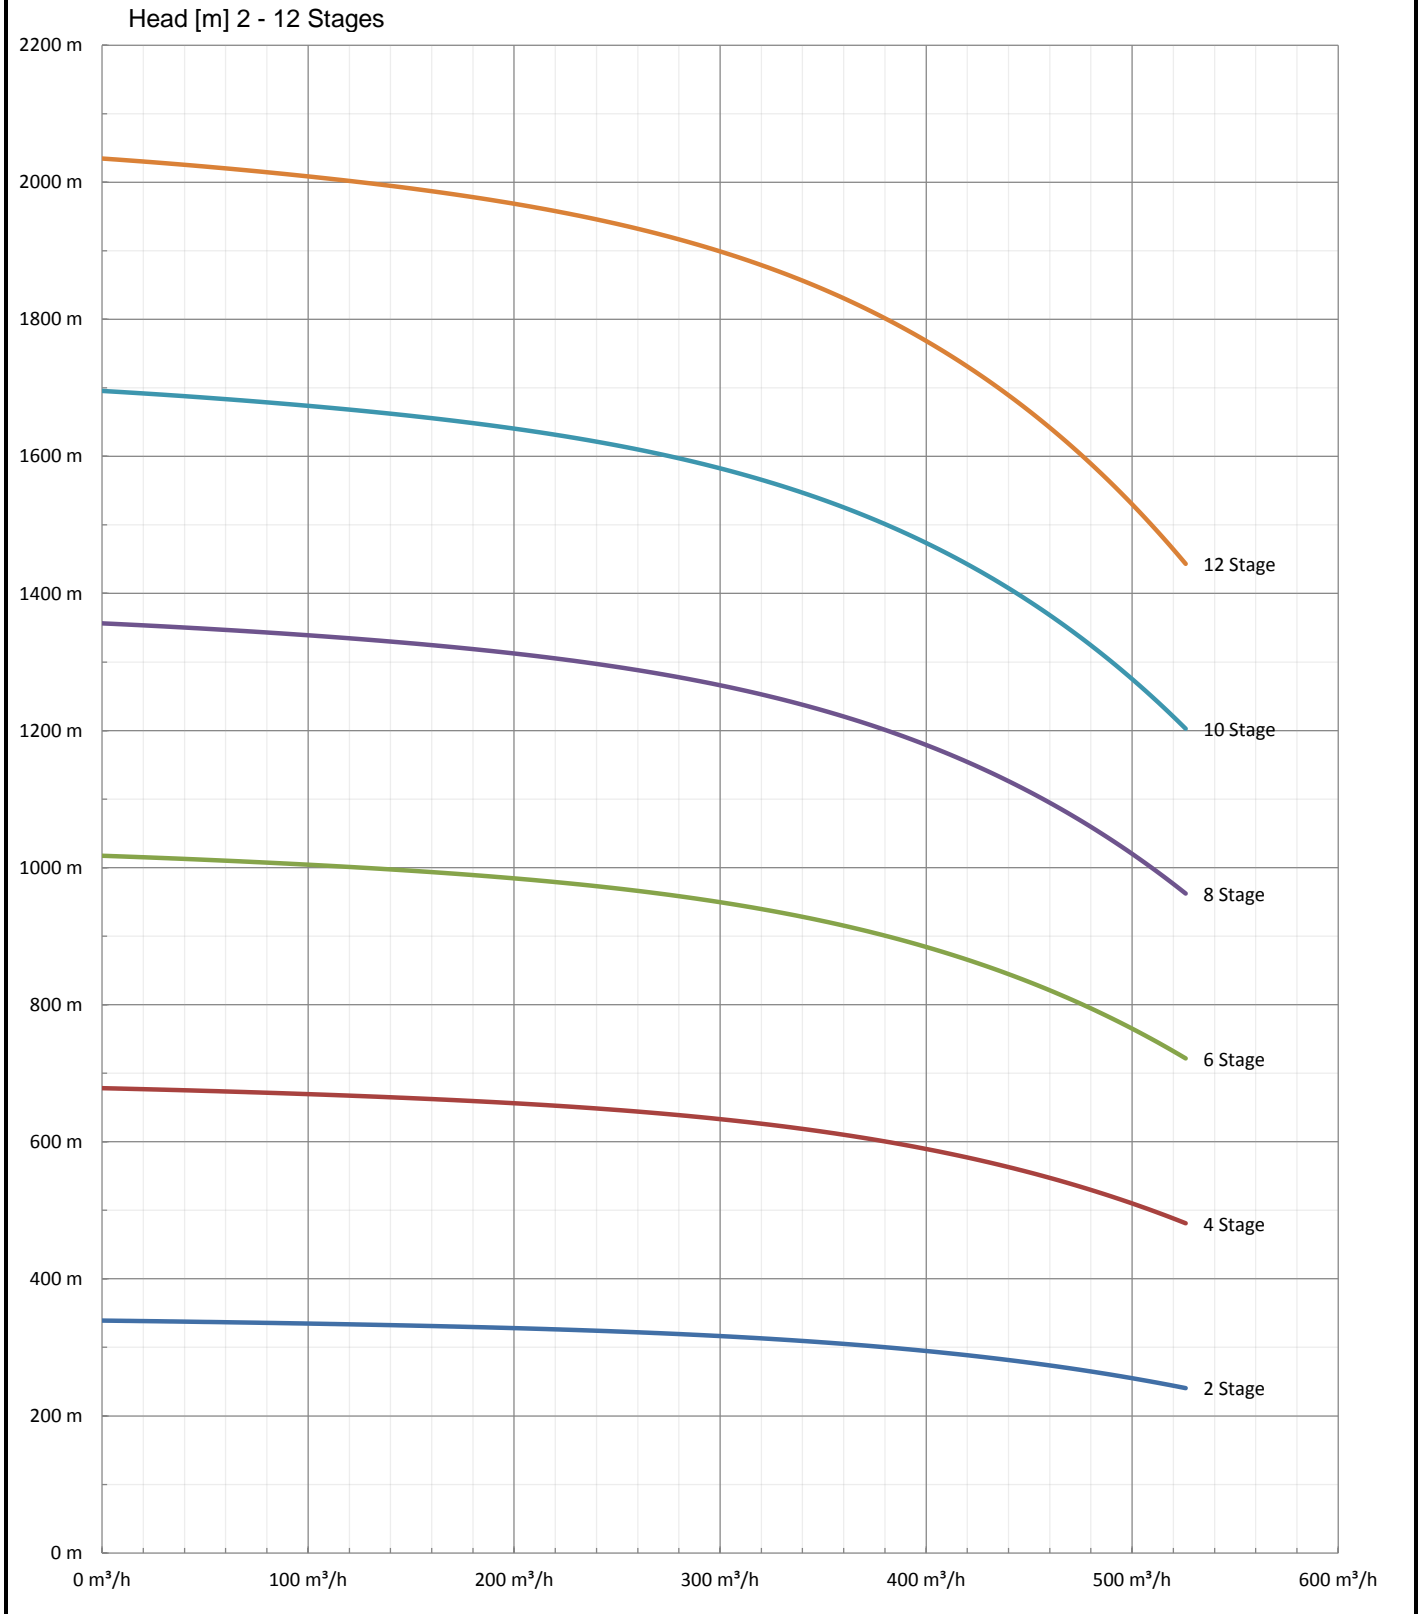

DOCUMENT NUMBER:	SCAG-R-210	ENGINEER:	Craig Adamson
REVISION:	3	PROJECT:	
DATE:	2017/03/14	CUSTOMER:	